

## Standard and Affordable SIP Phone for Business

The SIP-T42G is a feature-rich sip phone for business. The 12-Line IP Phone has been designed by pursuing ease of use in even the tiniest details. Delivering a superb sound quality as well as rich visual experience. Supports seamless migration to GigE-based network infrastructure. With programmableKeys, the IP Phone supports vast productivity-enhancing features. Using standard encryption protocols to perform highly secure remote provisioning and software upgrades.



Optima  
HD Voice



Gigabit



Paperless



### Key Features and Benefits

#### Revolutionarily new design

Yealink's SIP Phones continue to evolve, the T4 Series have been designed by pursuing ease of use in even the tiniest details, these new design include paper label free design, new foot stand allows two positions for the device, non-slip rubber feet, ergonomic recessed buttons, etc.

#### HD Audio

Yealink Optima HD Voice refers to the combination of software and hardware design as well as the implementation of wideband technology to maximizes the acoustic performance. Coupled with advanced acoustic clarity technology such as full duplex, echo cancellation, Adaptive jitter buffer, etc., it creates an amazing face-to-face live experience.

#### Enhanced Call Management

The SIP-T42G supports vast productivity-enhancing feature such as SCA, BLF List, call forward, call transfer, 3-way conference. Three pages of 6 flexible buttons are shown on the display can be programmed up to 15 various features. Support Yealink YHS32. With EHS36 user can control phone through wireless headset.

#### Efficient Installation and Provisioning

Dual-port Gigabit Ethernet is designed for flexible deployment options and lower cabling expenses. Integrated IEEE 802.3af Power-over-Ethernet allows easy deployment with centralized powering and backup. The SIP-T42G support the FTP, TFTP, HTTP, and HTTPS protocols for file provisioning and are configured by default to use Trivial File Transfer Protocol (TFTP), supports AES encrypted XML configuration file.

#### Highly secure transport and interoperability

The Communicator uses SIP over Transport Layer Security (TLS/SSL) to provide service providers the latest technology for enhanced network security. The range is certified compatible with 3CX and Broadsoft Broadworks, ensuring excellent compatibility with leading soft switch suppliers.

- > Revolutionarily new design
- > Yealink Optima HD voice
- > Dual-port Gigabit Ethernet
- > 2.7" 192x64-pixel graphical LCD with backlight
- > Up to 12 SIP accounts
- > Paper label free design
- > PoE support
- > Headset, EHS support
- > Integrated stand with 2 adjustable angles
- > Wall mountable
- > Simple, flexible and secure provisioning options

### Audio Features

- > HD voice: HD handset, HD speaker
- > Wideband codec: AMR-WB (optional), G.722
- > Narrowband codec: AMR-NB (optional), G.711(A/μ), G.723.1, G.729AB, G.726, iLBC
- > DTMF: In-band, Out-of-band(RFC 2833) and SIP INFO
- > Full-duplex hands-free speakerphone with AEC
- > VAD, CNG, AEC, PLC, AJB, AGC

### Phone Features

- > 12 VoIP accounts
- > One-touch speed dial, redial
- > Call forward, call waiting
- > Call transfer, call hold
- > Call return, group listening
- > Mute, auto answer, DND
- > 3-way conference call
- > Direct IP call without SIP proxy
- > Ring tone selection/import/delete
- > Hotline, emergency call
- > Set date time manually or automatically
- > Dial plan
- > XML Browser,
- > Action URL/URI
- > RTCP-XR (RFC3611), VQ-RTCPXR (RFC6035)
- > Enhanced DSS Key

### Directory

- > Local phonebook up to 1000 entries
- > Black list
- > XML/LDAP remote phonebook
- > Intelligent search method
- > Phonebook search/import/export
- > Call history: dialed/received/missed/forwarded

### IP-PBX Features

- > Busy Lamp Field (BLF)
- > Bridged Line Appearance(BLA)
- > Anonymous call, anonymous call rejection
- > Hot-desking, voice mail
- > Message Waiting Indicator (MWI)
- > Call park, call pickup
- > Intercom, paging, music on hold
- > Call recording
- > Flexible seating
- > Executive and Assistant
- > Centralized call recording
- > Visual Voice Mail

### Display and Indicator

- > 2.7" 192x64-pixel graphical LCD with backlight
- > LED for call and message waiting indication
- > Dual-color (red or green) illuminated LEDs for line status information
- > Intuitive user interface with icons and soft keys
- > Multilingual user interface
- > Caller ID with name and number
- > Power saving

### Feature keys

- > 6 line keys with LED
- > 6 line keys can be programmed up to 15 various features (3-page view)
- > 5 features keys: message, headset, mute, redial, hands-free speakerphone
- > 4 context-sensitive "soft" keys
- > 6 navigation keys
- > 2 volume control keys
- > Illuminated mute key
- > Illuminated headset key
- > Illuminated hands-free speakerphone key

### Interface

- > Dual-port Gigabit Ethernet
- > 1 x RJ9 (4P4C) handset port
- > 1 x RJ9 (4P4C) headset port
- > 1 x RJ12 (6P6C) EHS port
- > Power over Ethernet (IEEE 802.3af), Class 2

### Other Physical Features

- > Color: Classic Grey
- > Stand with 2 adjustable angles
- > Wall mountable
- > External Yealink AC adapter (optional): AC 100~240V input and DC 5V/1.2A output
- > Power consumption (PSU): 1.4-2.8W
- > Power consumption (PoE): 2.1-3.9W
- > Dimension(W\*D\*H\*mm): 212mm\*189mm\*175mm\*54mm
- > Operating humidity: 10~95%
- > Operating temperature: -10~50°C (+14~122°F)

### Management

- > Configuration: browser/phone/auto-provision
- > Auto provision via FTP/TFTP/HTTP/HTTPS for mass deploy
- > Auto-provision with PnP

- > Zero-sp-touch, TR-069
- > Phone lock for personal privacy protection
- > Reset to factory, reboot
- > Package tracing export, system log

### Network and Security

- > SIP v1 (RFC2543), v2 (RFC3261)
- > Call server redundancy supported
- > NAT traversal: STUN mode
- > Proxy mode and peer-to-peer SIP link mode
- > IP assignment: static/DHCP
- > HTTP/HTTPS web server
- > Time and date synchronization using SNTP
- > UDP/TCP/DNS-SRV(RFC 3263)
- > QoS: 802.1p/Q tagging (VLAN), Layer 3 ToS DSCP
- > SRTP for voice
- > Transport Layer Security (TLS)
- > HTTPS certificate manager
- > AES encryption for configuration file
- > Digest authentication
- > OpenVPN, IEEE802.1X
- > IPv6
- > LLDP/CDP/DHCP VLAN
- > ICE

### Package Features

- > Package content:
  - Yealink SIP-T42G IP phone
  - Handset with handset cord
  - Ethernet Cable (2m CAT5E UTP Cable)
  - Stand
  - Quick Start Guide
  - Power Adapter (Optional)
  - Wall Mount Bracket (Optional)
- > Qty/CTN: 5 PCS
- > N.W/CTN: 6.4 kg
- > G.W/CTN: 7.0 kg
- > Giftbox size: 246mm\*223mm\*120mm
- > Carton Meas: 620mm\*256mm\*233mm


### Compliance



Distributed by:



E-mail: [sales@pulsesupply.com](mailto:sales@pulsesupply.com)  
<https://www.pulsesupply.com/yealink>

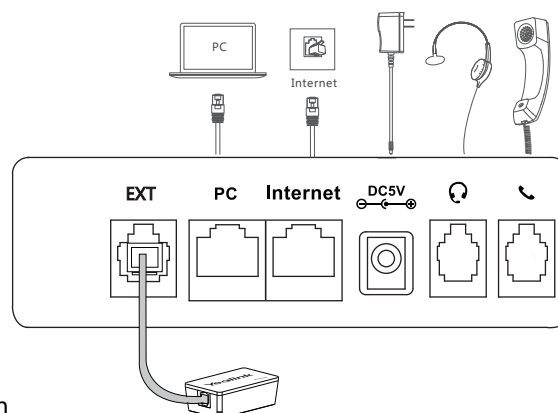



## About Yealink

Yealink is a global leading provider of enterprise communication and collaboration solutions, offering video conferencing service to worldwide enterprises. Focusing on research and development, Yealink also insists on innovation and creation. With the outstanding technical patents of cloud computing, audio, video and image processing technology, Yealink has built up a panoramic collaboration solution of audio and video conferencing by merging its cloud services with a series of endpoints products. As one of the best providers in more than 140 countries and regions including the US, the UK and Australia, Yealink ranks No.1 in the global market share of SIP phone shipments.

## Copyright

Copyright © 2018 YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD.

Copyright © 2018 Yealink(Xiamen) Network Technology CO., LTD. All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Yealink(Xiamen) Network Technology CO., LTD.

## Technical Support

Visit Yealink WIKI (<http://support.yealink.com/>) for firmware downloads, product documents, FAQ, and more. For better service, we sincerely recommend you to use Yealink Ticketing system (<https://ticket.yealink.com>) to submit all your technical issues.



YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.  
Web: [www.yealink.com](http://www.yealink.com)  
Addr: No.1 Ling-Xia North Road, High Tech Park,  
Huli District, Xiamen, Fujian, P.R. China  
Copyright©2018Yealink Inc. All right reserved.