



SDG 8733A

Wi-Fi 7 tri-band mesh satellite with 10GbE WAN and 2.5GbE LAN Ports

Benefits

- True 10 Gigabit Wi-Fi 7 tri-band gateway
- Zero-touch install via intuitive mobile app
- High-performance tri-band mesh Wi-Fi with support for 6GHz band and 320MHz channels
- Multi-core ARM processor to power next-generation smart home applications
- Advanced antenna design ensures better rate-reach and 360° coverage
- Open cloud-management support - Intellifi or TR-069
- USB-C powered

Overview

Adtran's 8700 Series Wi-Fi 7 Service Delivery Gateways (SDGs) build upon the successes of their predecessors, enabling 10 Gigabit services and Extremely High Throughput (EHT) Wi-Fi 7, with better than ever, class-leading subscriber experience enhancements.

Carrier-Class 10 Gigabit gateway

The SDG 8733A is a carrier-class, tri-band Wi-Fi 7 (802.11be) residential gateway with a 10GbE WAN port and 2.5GbE LAN port, making it ideal for competitive 10Gbit/s services to homes and small businesses. With 10 radio streams across the 2.4GHz, 5GHz and 6GHz bands (2x2 + 3x3 + 3x3), the SDG 8733A delivers up to 14Gbit/s aggregate Wi-Fi throughput. Now, you can support hundreds of smart-home devices and bandwidth-intensive gaming, streaming, AR/VR, and remote working applications for multiple users in the home or business. The SDG 8733A also supports multigigabit on the LAN with a 2.5GbE port for wired connections.

Powerful yet power-efficient

The SDG 8700 Series features an advanced ARM multicore CPU, boasting 4x more processing power to support multiple 4K streams, low latency gaming applications, and innovative revenue-boosting smart home apps. Intelligent power management, a 6nm processor, and the use of recyclable materials ensure a sustainable, environmentally friendly Wi-Fi solution. In addition, the elegant, compact design with USB-C powering supports wall-mounting or placement on a desk, bookshelf, or tabletop to deliver exceptional Wi-Fi experiences to all users.

Open platforms unlock innovation

The Adtran Residential Wi-Fi solutions, including 800, 8600 and 8700 Series SDGs, provide operators with a choice of market-leading open-source platforms. We support the Intellifi-managed Wi-Fi platform or TR-069, allowing you to deliver the right cloud-managed Wi-Fi solution customized to your market and business needs.

SDG 8733A

Product specifications

Network interfaces

- 1 x 10GBASE-T ports
- 1 x WAN
- 1 x 2.5GBASE-T LAN port (IEEE 802.3bz-2016)
- MDI/MDI-X automatically sense
- RJ-45 ports with integrated link and activity LEDs

WLAN interfaces

- Compliant with IEEE 802.11b/g/n/ac/ax/be
- Tri-band radio configuration
 - 2.4GHz 2x2 up to 40MHz
 - 5GHz 3x3 up to 160MHz
 - 6GHz 3x3 up to 320MHz
- 3 x SSIDs per radio
- Integrated internal antenna array
- WPA3 support
- WPA2/WPA3 mixed-mode support

Software features*

- Multiple WAN services
 - DHCPv4/v6
 - RFC2516 PPPoE
 - PPPoE pass-through
- DNS proxy server
- Dynamic DNS client
- DHCP server, client, and relay
- DHCP options 60 and 121
- NAPT and NAT
- IGMPv2/v3 proxy and snooping
- LAN port to VLAN mapping
- Port forwarding
- Universal plug-and-play (UPnP)
- Network time protocol (NTP)
- Firewall with stateful packet inspection
- IPv6
- Stateless address autoconfiguration (SLAAC)
- DHCPv6
- DNSv6
- Mesh Wi-Fi features
 - IEEE 802.11 4-address (4mac) encapsulation
 - IEEE 802.11k Radio resource measurement
 - IEEE 802.11v Wireless network management
 - IEEE 802.11r Fast BSS transition
 - Zero-touch AP pairing
- Custom Default Themes (CDT)/Configurations
- Touchless Quality of Service (wired and Wi-Fi)
- AutoWAN
- TR-069 Remote Management
- TR-181 Device Data Model

Ethernet services

- Symmetric 10 Gbit/s Throughput
- 802.1D Bridging
- Virtual Switch Based on 802.1q VLAN
- VLAN Tagging/Untagging Per Ethernet Port
- VLAN Stacking (Q-in-Q) and VLAN Translation
- IP ToS/DSCP to 802.1p Mapping
- Quality of Service (QoS)
 - VLAN-ID
 - 802.1p bit
 - DSCP to p Bit Translation
- Marking/Remarking of 802.1p
- IGMP v2/v3 Snooping

Console port

- Compatible with USB to TTL FDTI type serial adapters

Dimensions

- Size: 7.2" x 4.25" x 4.25" (183mm x 108mm x 108mm)
(H x W x D)
- Weight: ~1lb (500 gm)

Operating environment

- 41° F – 104° F (5° C – 40° C)
- Humidity: 5% – 85% relative humidity

Safety and EMI

- FCC certified
- Industry Canada certified
- cULus Listed (UL 62368-1)
- ETSI compliant
- CE certificate
- UKCA certified
- ACMA/RCM certified

Environmental

- RoHS: Directive 2015/863/EU
- WEEE: Directive 2012/19/EU WEEE

Power supply unit

- External USB-C power adapter
- AC Input: 100~240V, 50/60Hz @ 1.0A
- DC Output: 15 VDC @ 3.0A, USB-C
- Surge Protection: ITU-T K.21 Enhanced compliant


*Features depend on firmware load

SDG 8733A

Ordering information

Product	Region	Wi-Fi Country Code	Part Number
SDG8733A (SmartOS)	Global	All regions	17600079FGS
Supported Accessories			
SDG Wallmount kit (M)			17600201FI

*For additional part numbers or a custom quote, please contact sales@adtran.com.

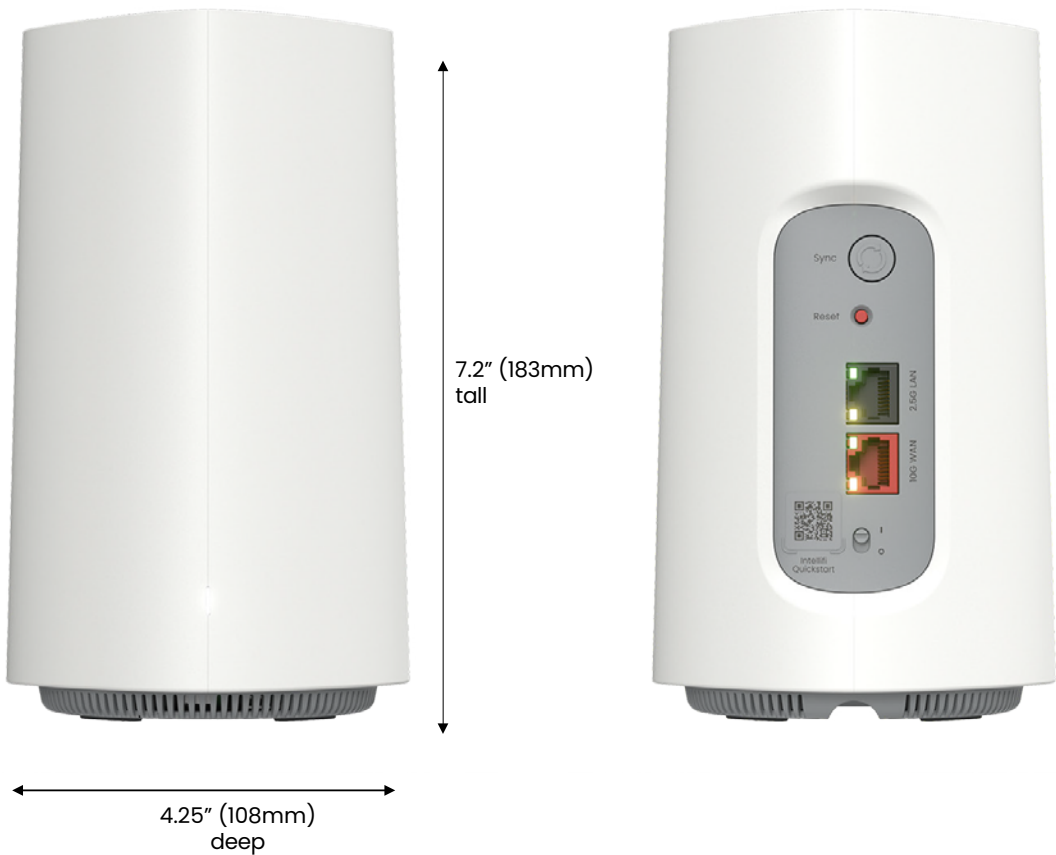

Distributed by:



E-mail: sales@pulsesupply.com
<https://www.pulsesupply.com/adtran>

Updated May 12, 2025



Copyright © 2025 Adtran, Inc. All rights reserved. Adtran believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. Adtran and the other trademarks listed at www.adtran.com/trademarks are registered trademarks of Adtran, Inc. or its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.

