


# IP SPEAKER serial

- IS-640
- IS-640P
- IS-650
- IS-660
- IS-670




### IP speakers work stand-alone

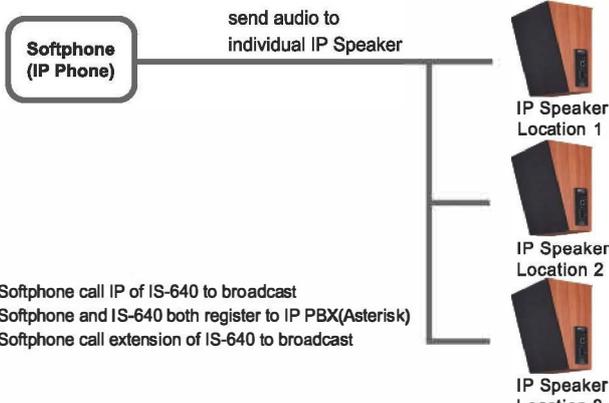

1. Softphone call IP of IS-640 to broadcast
2. Softphone and IS-640 both register to IP PBX(Asterisk)  
Softphone call extension of IS-640 to broadcast

\* compatible with IS serial IP speakers

### IP Speakers work with IBS (IP Broadcasting System)

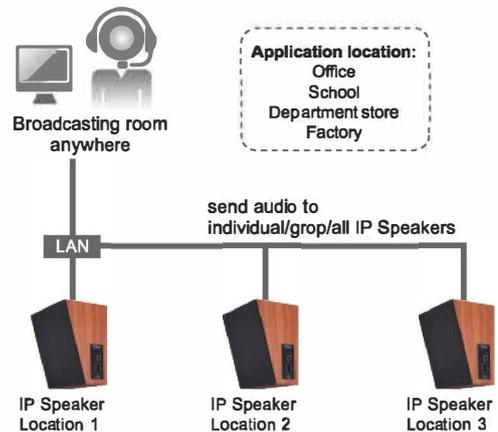

### IP Speaker Specification

|                  | Wood speaker            |                | Horn speaker | Ceiling speaker | Wall speaker |
|------------------|-------------------------|----------------|--------------|-----------------|--------------|
| Model No         | IS-640                  | IS-640P        | IS-650       | IS-660          | IS-670       |
| Speaker          | 8"                      | 8"             | 11x8"        | 5"              | 6.5"+2"      |
| Dlm(cm)          | 17.5x28x24.5x9          | 17.5x28x24.5x9 | 28x20x28     | 19.8x16.6x11    | 27x15x19.5   |
| Weight(g)        | 3000                    | 2640           | 2500         | 900             | 2350         |
| Impedance        |                         |                | 8Ω           |                 |              |
| Rated Power      | 40W                     | 40W            | 30W          | 6W              | 30W          |
| Power supply     | 110V-240V 1A            |                | PoE(30W)     |                 |              |
| Water Protection | ---                     | ---            | IP66         | ---             | IP55         |
| Protocol         | SIP(RFC2543,RFC3261)    |                |              |                 |              |
| Codec            | G.711 u-Law,G.711 a-Law |                |              |                 |              |
| LAN connection   | RJ45 10/100 Mbps        |                |              |                 |              |
| Warranty         | 1 Year                  |                |              |                 |              |