

NetVanta

1550 Series

Layer 3 Lite, Gigabit Ethernet Switches



Benefits

- 24 or 48 10/100/1000Base-T ports
- Four SFP+ ports support up to 10 Gbps each
- Multilayer switching (Layer 2 and Layer 3)
- Non-blocking switching capacity up to 176 Gbps
- Faster VoIP deployments with VoIP setup wizard, advanced QoS and “zero-touch” phone setup
- Fully managed (Web GUI and CLI)
- 802.3af (PoE), 802.3at (PoE+) and legacy PoE
- Standard RJ-45 console port and additional Micro-USB port for management
- Built-in surge protection
- Limited lifetime warranty
- Includes advanced hardware replacement

Overview

The NetVanta® 1550 Series of enterprise-class, fully managed Gigabit switches are the best switches for Voice over IP (VoIP). These fully managed switches are purpose built for enterprises looking to upgrade their networks with high-performance, reliable, scalable and easy-to-manage switching solutions. NetVanta 1550 switches offer advanced multi-layer switching, high-bandwidth capabilities, “voice-aware” features, and include built-in surge protection.

Best VoIP Switch, Period.

The NetVanta 1550 Series of Gigabit switches are the best switches for VoIP, delivering high voice fidelity, faster VoIP deployment, ease of management, and maximum network uptime.

- **Voice Fidelity:** The switches provide 24 or 48 GigE ports with four SFP+ (10 G) ports, delivering up to 80 Gbps of uplink capacity to support a greater number of HD-voice connections, video streaming, Wi-Fi® and other bandwidth-intensive applications.


- **Faster Deployment and Ease of Use:** A built-in VoIP Setup Wizard and zero-touch phone setup simplify VoIP deployments. These switches offer flexible management options including Web GUI and CLI.
- **Guaranteed Maximum Uptime:** NetVanta 1550 Series switches have built-in surge protection to mitigate the risk from power surges, delivering greater reliability. The switches also include limited lifetime warranties, 7x24 tech support and advanced hardware replacement, minimizing business risk.

Hardware

NetVanta 1550 Series rackmount switches support 24 and 48 10/100/ 1000Base-T ports and four SFP+ uplink ports. Each SFP+ port supports up to 10 Gbps uplinks delivering up to 80 Gbps of bidirectional throughput.

Multi-layer Switching

The NetVanta 1550 Series supports advanced multilayer (Layer 2 and Layer 3 lite) switching with up to 32 static routes, to enable scaling from small business to enterprise-sized networks.

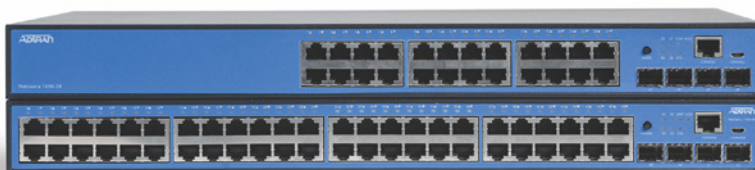

NetVanta 1550 Series

Security

NetVanta 1550 Series Gigabit switches offer a variety of data security features including Denial of Service (DoS) protection, MAC-based port security, 802.1x port authentication, multilevel user passwords, Secure Shell (SSH) and Secure Socket Layer (SSL) for encrypted user login. In addition, the switches support Authentication, Authorization and Accounting (AAA) for authentication with RADIUS and TACACS+.

The ADTRAN Operation System (AOS) also features a PCI Compliance Audit tool, Desktop Auditing via DHCP and Microsoft Network Access Protection (NAP) to offer enhanced security.

Administration

AOS offers both a CLI and an intuitive Web-based GUI with configuration wizards. To automate setup and configuration, NetVanta 1550 Series switches support Auto-Config which provides the ability to automatically obtain the switch configuration via DHCP.

AOS also offers network forensics, cable and SFP diagnostics and an on-demand VoIP report to simplify troubleshooting.

PoE

The NetVanta 1550-24P and NetVanta 1550-48P provide standards-based 802.3af (PoE), 802.3at (PoE+) and Legacy PoE functionality for IP phones, Wireless Access Points (WAPs), or other PoE-powered IP devices.

Port Scheduler

The NetVanta 1550 Series of Gigabit switches includes a built-in port scheduler that allows ports to be enabled or disabled based on time of day. This ability to schedule available ports allows for added security and energy conservation.

iSCSI Optimized

All ADTRAN NetVanta Gigabit Ethernet switches are optimized for iSCSI Storage Area Network (SANs) deployments. Network administrators can take advantage of features such as jumbo frame support (up to 9K), separation of iSCSI network traffic utilizing VLANs and 802.3x flow control to seamlessly integrate ADTRAN switches with iSCSI SANs devices.

Product Specifications

Physical Interfaces

Ethernet Ports

- NetVanta 1550-24/24P: 24 10/100/1000Base-T
- NetVanta 1550-48/48P: 48 10/100/1000Base-T
- Four Enhanced 1/10 Gbps SFP+ Ports
- Autorate/Duplex/MDI/MDI-X

Console Port

- RJ-45
- Micro USB

Switching Performance

- Non-blocking Layer 2/3 Switching
- 16,000 MAC Addresses

Maximum Forwarding Bandwidth

- NetVanta 1550-24/24P: 128 Gbps
- NetVanta 1550-48/48P: 176 Gbps

Layer 2 Support

- 802.1d Spanning Tree
- 802.1w Rapid STP
- 802.3ad Link Aggregation
- Jumbo Frames (9K)
- IGMP Snooping/Querier
- 802.3x Flow Control

Layer 3 Support

- 32 Static Routes
- 16 Layer 3 Interfaces
- UDP Relay
- 232 ARP Entries
- IPv6 Management

Layer 3 Lite, Gigabit Ethernet Switches with PoE

Diagnostics

- Port Mirroring
- LLDP (802.1AB)
- LLDP-MED
- Ping
- Cable Diagnostics

Front Panel Status LEDs

- Status
- LAN: Link, Activity
- LED Port Button: Toggle Port LEDs between Link, Activity, and ActivChassis

Port Statistics

- Number of TX/RX Frames, Collisions, Errors

Quality of Service

- 802.1p and DiffServ
- Four Output Queues Per Egress Port
- Weighted Round Robin (WRR)
- Strict Priority Scheduling

VLAN

- Guest VLAN
- Port-based VLANs
- 802.1Q Tagged Trunked VLANs
- Voice VLANs
- Dynamic 802.1x Assigned VLANs
- Supports up to 255 Active VLANs

PoE (NetVanta 24P/48P)

- 802.3af (PoE), 802.3at (PoE+) and Legacy PoE
- Max 25.5 Watts per Port
- 370 Watts (Total)
- Power Management

Administration

- CLI (Console/Telnet/ SSH)
- SNMP V3
- Web-based GUI
- SYSLOG
- Email Alerts
- n-Command Support
- TACACS+
- RADIUS
- Auto-Config
- TCL Scripting
- DHCP Network Forensics
- Port Scheduler

Security

- 802.1x Port Authentication
- Port Security
- DoS Protection
- Hardware ACLs
- Microsoft Desktop Auditing
- AOS PCI Compliance Audit Tool

Environment

- Operating Temperature: 32° to 122° F (0° to 50° C)
- Storage Temperature: -4° to 158° F (-20° to 70° C)
- Relative Humidity: Up to 95%, Non-condensing

Agency Approvals

- FCC Part 15 Class A and B
- EN 300 386
- EN 61000-3-2
- EN 61000-3-3
- ICES 003 Class A
- AS/NZS CISPR22 Class A
- UL/CUL 60950-1
- EN 60950-1
- IEC 60950-1
- AS/NZS 60950.1
- RoHS Compliant

Warranty

- Limited Lifetime Warranty

NetVanta 1550 Series

Physical and Power

Chassis

- 1U, 19 in. (48.26 cm)
- Rackmountable Metal Enclosure

NetVanta 1550-24

- Dimensions: 1.75 in. x 17.4 in. x 13 in. (4.45 cm x 44.2 cm x 33.02 cm) (H x W x D)
- Weight: 9.5 lbs. (4.4 kg)
- AC Power: 100-240 VAC, 50/60 Hz
- Power: 460 Watts

NetVanta 1550-24P

- Dimensions: 1.75 in. x 17.4 in. x 13 in. (4.45 cm x 44.2 cm x 33.02 cm) (H x W x D)
- Weight: 9.5 lbs. (4.4 kg)
- AC Power: 100-240 VAC, 50/60 Hz
- Power: 460 Watts

NetVanta 1550-48

- Dimensions: 1.75 in. x 17.4 in. x 13 in. (4.45 cm x 44.2 cm x 33.02 cm) (H x W x D)
- Weight: 10.5 lbs. (5 kg)
- AC Power: 100-240 VAC, 50/60 Hz
- Power: 460 Watts

NetVanta 1550-48P

- Dimensions: 1.75 in. x 17.4 in. x 13 in. (4.45 cm x 44.2 cm x 33.02 cm) (H x W x D)
- Weight: 10.5 lbs. (5 kg)
- AC Power: 100-240
- Power: 460 Watts

Ordering Information

Equipment	Part No.
NetVanta 1550-24 Chassis	17101524F1
NetVanta 1550-24P Chassis	17101524PF1
NetVanta 1550-48 Chassis	17101548F1
NetVanta 1550-48P Chassis	17101548PF1
NetVanta 1000Base-SX SFP	1200480E1
NetVanta 1000Base-LX SFP	1200481E1
NetVanta 1000Base-T SFP	1200485G1
NetVanta 10GBase-SR SFP+	1700485F1
NetVanta 10GBase-LR SFP+	1700486F1
NetVanta SFP+ Direct Attached Cable (1 meter)	1710484F1
NetVanta SFP+ Direct Attached Cable (3 meter)	1710484F3
NetVanta SFP+ Direct Attached Cable (5 meter)	1710484F5



Pulse Supply
909 Ridgebrook Road., Sparks, Maryland 21152, USA
TEL : +1-410-583-1701 FAX : +1-410-583-1704
E-mail: sales@pulsesupply.com
<https://www.pulsesupply.com/adtran>

6171015xxxF1-8E

April Copyright © 2020 ADTRAN, Inc. All rights reserved. ADTRAN believes the information in this publication to be accurate as of publication date, and is not responsible for error. Specifications subject to change without notice. ADTRAN and the other trademarks listed at www.adtran.com/trademarks are registered trademarks of ADTRAN, Inc. or its affiliates in various countries. All other trademarks mentioned in this document are the property of their respective owners.

ADTRAN warranty duration and entitlements vary by product and geography. For specific warranty information, visit www.adtran.com/warranty

ADTRAN products may be subject to U.S. export controls and other trade restrictions. Any export, re-export, or transfer of the products contrary to law is prohibited. For more information regarding exportation of ADTRAN items (e.g. commodities, technology, software), please visit www.adtran.com/exportlicense.

